



## 21.5" IPS technology panel with height adjustable stand and 100Hz refresh rate

Stylish edge-to-edge design makes the ProLite XUB2292HSU perfect for multi-monitor set-ups. The IPS panel technology offers accurate and consistent colour reproduction with wide viewing angles. The 100Hz refresh rate together with AdaptiveSync function provides an instant, tangible improvement in image smoothness. High contrast and brightness values mean the monitor will provide excellent performance for photographic and web design. Equipped with speakers, USB 3.2 hub, headphone socket, HDMI and DisplayPort connections, a blue light reducer function to reduce eye fatigue and an ergonomic 150mm height adjustable stand for optimal user comfort, make this monitor a great choice for both multi-monitor configuration and office applications.

Available also in black : [ProLite XUB2292HSU-B6](#)



100Hz

A 100Hz refresh rate translates into increased smoothness of the image. This means that flickering is reduced and therefore eye fatigue is also less noticeable. The increased frequency also means smoother transitions between contrasting colours, smoother motion scenes in both movies and gaming, and even reduced mouse cursor flickering.



IPS Technology

IPS displays are best known for wide viewing angles and natural, highly accurate colours. They are especially suited for colour-critical applications.

## 01 DISPLAY CHARACTERISTICS

|                      |   |
|----------------------|---|
| Design               | 3-side borderless   |
| Diagonal             | 21.5", 54.6cm   |
| Panel                | IPS Panel Technology LED, matte finish                                |
| Native resolution    | 1920 x 1080 @100Hz (2.1 megapixel Full HD)                            |
| Aspect ratio         | 16:9  |
| Panel brightness     | 250 cd/m <sup>2</sup>   |
| Static contrast      | 1000:1  |
| Advanced contrast    | 80M:1   |
| Response time (MPRT) | 0.4ms   |
| Viewing zone         | horizontal/vertical: 178°/178°, right/left: 89°/89°, up/down: 89°/89° |
| Colour support       | 16.7mIn (sRGB: 99%; NTSC: 72%)  |
| Horizontal Sync      | 30 - 115kHz   |
| Viewable area W x H  | 476.1 x 267.8mm, 18.7 x 10.5"   |
| Pixel pitch          | 0.248mm   |
| Colour               | matte, white  |

## 02 INTERFACES / CONNECTORS / CONTROLS

|                     |  |
|---------------------|--|
| Signal input        | HDMI x1<br>DisplayPort x1              |
| USB HUB             | x4 (v. 3.2 Gen 1 (5Gbps, DC5V, 900mA)) |
| HDCP                | yes                                    |
| Headphone connector | yes                                    |

## 03 FEATURES

|                       |   |
|-----------------------|---|
| Blue light reducer    | yes   |
| Flicker free          | yes   |
| Adaptive Sync support | yes   |
| Extra                 | i-Style colour  |
| OSD languages         | EN, DE, FR, ES, IT, PT, RU, JP, CZ, NL, PL  |
| Control buttons       | Signal Select / Exit, + / Volume, - / Eco +, Menu , Power   |
| User controls         | picture adjust (contrast, brightness, i-Style colour, ACR, Eco, OD, X-Res technology), image settings (blue light reducer, sharp&soft, video mode adjust), colour settings (gamma, 6-axis, colour temp.), audio settings (volume, mute), OSD settings (OSD H. position, OSD V. position, OSD time, OSD rotate, language), extra1 (MBR, FreeSync, USB BC), extra2 (reset, DDC/CI, signal select, HDMI range, opening logo, LED, information) |
| Speakers              | 2 x 2W  |
| Convenience           | Kensington-lock™ prepared, DDC/CI, DDC2B, Mac OSX   |

## 04 MECHANICAL

|                              |   |
|------------------------------|---|
| Display position adjustments | height, swivel, tilt, pivot (rotation both sides) |
| Height adjustment            | 150mm   |
| Rotation (PIVOT function)    | 90°   |
| Swivel stand                 | 90°; 45 ° left; 45° right                         |
| Tilt angle                   | 22° up; 5° down                                   |
| VESA mounting                | 100 x 100mm                                       |

|                         |     |
|-------------------------|-----|
| Cable management system | yes |
|-------------------------|-----|

05 ACCESSORIES INCLUDED

|        |                                 |
|--------|---------------------------------|
| Cables | power, USB, HDMI                |
| Other  | quick start guide, safety guide |

06 POWER MANAGEMENT


|                   |   |
|-------------------|---|
| Power supply unit | internal                                  |
| Power supply      | AC 100 - 240V, 50/60Hz                    |
| Power usage       | 14W typical, 0.5W stand by, 0.3W off mode |

07 SUSTAINABILITY

|             |   |
|-------------|---|
| Regulations | TCO Certified, CE, TÜV-Bauart, EAC, VCCI-B, PSE, RoHS support, ErP, WEEE, REACH, UKCA |
| REACH SVHC  | above 0.1%: Lead  |

08 DIMENSIONS / WEIGHT

|                              |                                 |
|------------------------------|---------------------------------|
| Product dimensions W x H x D | 489.5 x 336.5 (486.5) x 109.5mm |
| Box dimensions W x H x D     | 560 x 380 x 159mm               |
| Weight (without box)         | 4.5kg                           |
| Weight (with box)            | 5.9kg                           |
| EAN code                     | 4948570123322                   |

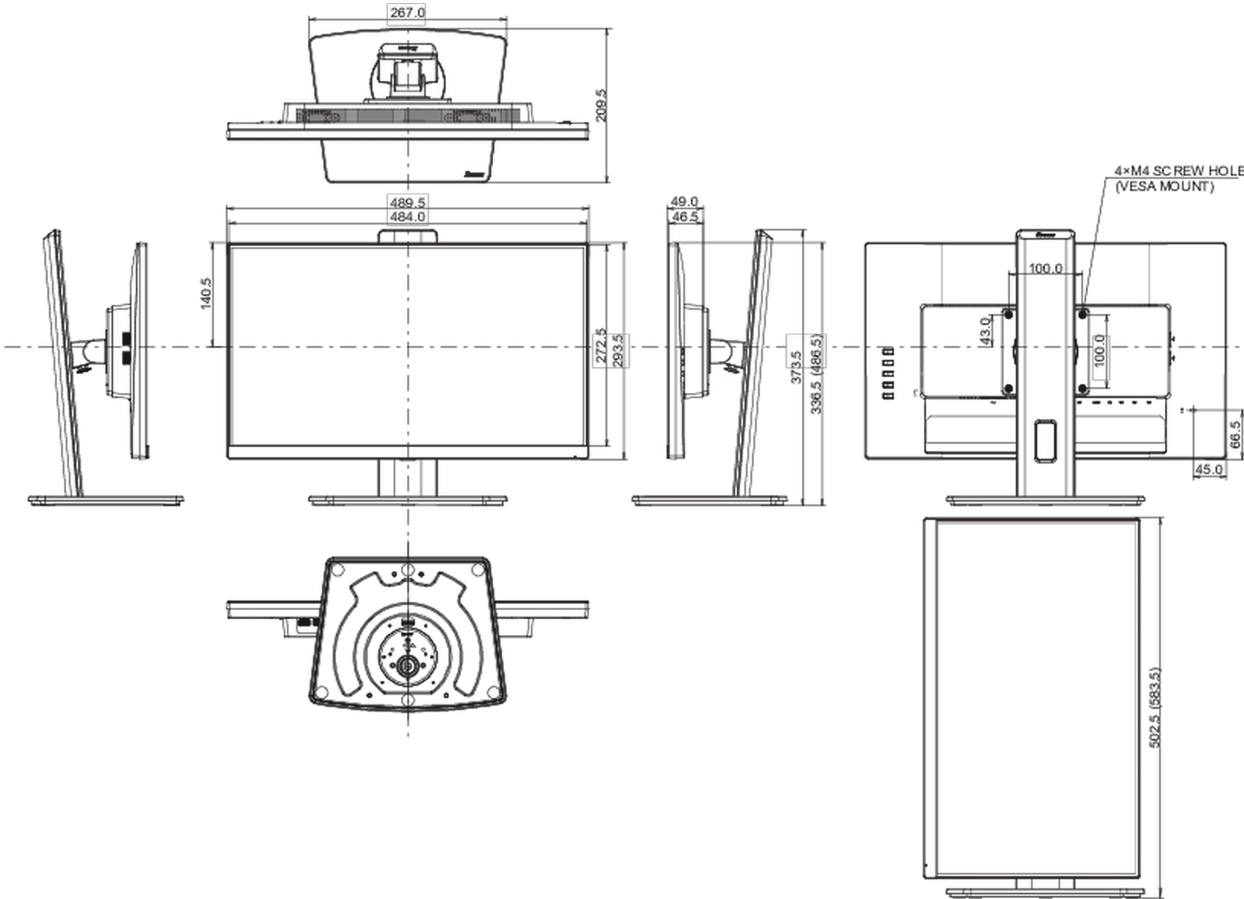

*All trademarks and registered trademarks acknowledged. E & O E. Specification subject to change without notice. All LCD's comply with ISO-9241-307:2008 in connection with pixel defects.*

© IIYAMA CORPORATION. ALL RIGHTS RESERVED